




Introducing the all-new

PressureGuard® APM².

Alternating Pressure / Lateral Rotation Air Therapy Surface

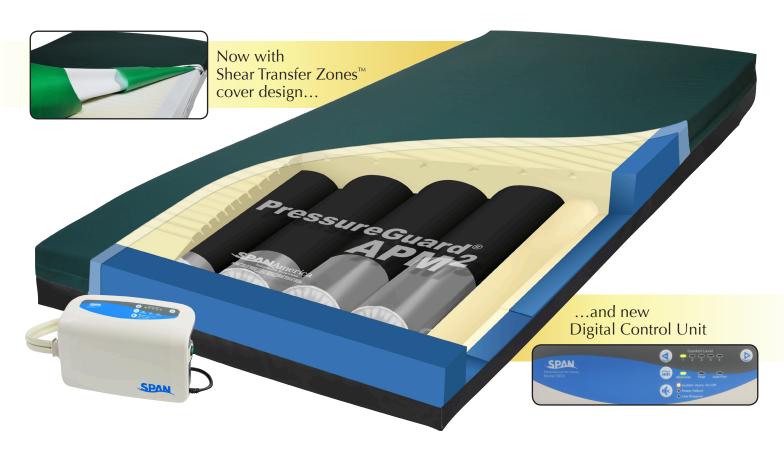

Twice the Flexibility

Choice of two therapies at the flip of a switch delivers double the value for busy caregivers.

Twice the Simplicity

Ease of operation and cleaning make it equally user-friendly in facility or at home.

Twice the Safety

Minimizes risks associated with edge-of-bed/ entrapment issues and patient transfers.



All New PressureGuard® APM² with digital control unit.

The APM² has been an industry-leading air therapy solution for more than a decade, based in large part on its documented superiority vs. typical, roll-up treatment surfaces(1). Newly upgraded cover design and control unit provide even greater immersion, envelopment, shear reduction, treatment flexibility, caregiver ergonomics and user comfort.

Key Features Include:



Ensures safer transfers while minimizing the risk of falls and patient entrapment.



Unique Geo-Matt® Design

Creates tissue-friendly, anti-shearing surface with 800 individually responsive



Protective Heel Slope®

Redistributes load to calves while providing complete foot support.

Treatment Flexibility...

Gives caregivers choice of four modes:

- **Alternating Pressure** without extreme pressure gradients.
- Lateral Rotation, a versatile modality indicated for a variety of patient needs.
- **Powered Flotation** suspends alternation while maintaining ideal pressures.
- Timed Auto Firm facilitates patient care, then returns to previous mode.





Power Failure Low Pressure Digital Multi-function Control Unit Lightweight and quiet, it delivers an unmatched combination of treatment flexibility, ease of use, and dependability.


- Low Pressure indicator light and selectable audible alarm.
- Power Failure indicator light and selectable audible alarm.
 - · Simple, indexed comfort adjustment.
 - Timed (20-minute) "Auto Firm" mode for transfers, ADLs, & CPR.
 - "Float" mode provides powered flotation therapy.
 - "Alternate" mode changes loading in 10-minute cycle; controlled at mattress for choice of lateral rotation or alternating pressure therapy.

Span-America Exclusive ___

Shear Transfer Zones[™] cover design

(U.S. Patent No 8,438,682)

In addition to the Geo-Matt[®] segmented top surface, Span-America's exclusive Shear Transfer Zones[™] design provides an additional measure of shearing protection in the form of the silicone-coated, shear-minimizing fabric bands located on the underside of the bi-directional stretch cover.

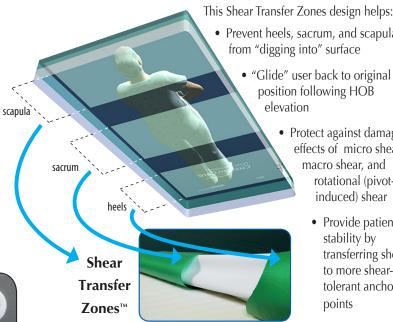

• Prevent heels, sacrum, and scapula from "digging into" surface • "Glide" user back to original position following HOB

> Protect against damaging effects of micro shear, macro shear, and rotational (pivotinduced) shear

> > Provide patient stability by transferring shear to more sheartolerant anchor points

Item #	Description		Dimensions
5875LR-29 5880LR-29 5884LR-29 5900	APM ² with digital control unit APM ² with digital control unit APM ² with digital control unit Digital control unit only		75"L x 35"W x 7"H 80"L x 35"W x 7"H 84"L x 35"W x 7"H
Cover: Fluid-proof, anti-microbial, anti-fungal, flame-resistant, fluid-impervious, wipe-clean.			
Control Unit:	Weight: 6.3 lbs. Voltage: 120 AC Frequency: 60 Hertz	Max current:	12" x 7.5" x 5" 1.0 Amp Certified to IEC 60601-1-1
Weight limit: 350 lbs. Mattress weight: approx. 20 lbs. 18-month warranty (all components)			
Flammability: Conforms to NFPA 101 (Life Safety Code): Cal Tech Bulletin #117; 16 CFR Parts 1632 and 1633 and BFD IX-11.			

